COBRA OUL 9 KN

ALUMINIUM

25 mm, XL clips, open under load
Art.no.: FO25KFV-XL



The COBRA® OUL can be opened under load, unlike all other COBRA® Quick Release buckles. Therefore it can for example be used to secure cargo or wherever items have to be immediately accessible. This is why it can't be used as a personal protective equipment. However, the breaking load is still the same as the one of the non-OUL models. A COBRA® OUL can not be combined with a regular COBRA®, but a COBRA® OUL can be combined any other COBRA® OUL of the same type.

The COBRA® OUL (9 kN) can be opened under load. In combination with a fitting webbing, the minimum guaranteed load capacity is 18 kN in loop configuration. Not suitable as PPE!


use cases:
Fashion, tactical, equipment

Technical specifications

BODY	**Material:** aluminium **Color:** black **Finish:** ktl-coated
CLIPS	**Material:** brass **Color:** colorless **Finish:** polished
BAR	**Material:** stainless steel **Color:** colorless **Finish:** polished
BREAKING LOAD TENSILE STRENGTH	9 kN
BREAKING LOAD LOOP CONFIGURATION	18 kN
WEIGHT	59 g
RECOMM. WEBBING WIDTH MALE PART	25 mm
RECOMM. WEBBING WIDTH FEMALE PART	25 mm

SLOT WIDTH MALE PART	4 mm
SLOT WIDTH FEMALE PART	14 mm
OUTER DIMENSION LENGTH	63 mm
OUTER DIMENSION WIDTH	40 mm
OUTER DIMENSION DEPTH	10 mm
WEBBING SLOT MALE PART	non-adjustable
WEBBING SLOT FEMALE PART	adjustable
SIZE OF CLIPS	XL
COUNTRY OF ORIGIN	Austria
Patented	
STANDARDS	EN ISO 9227

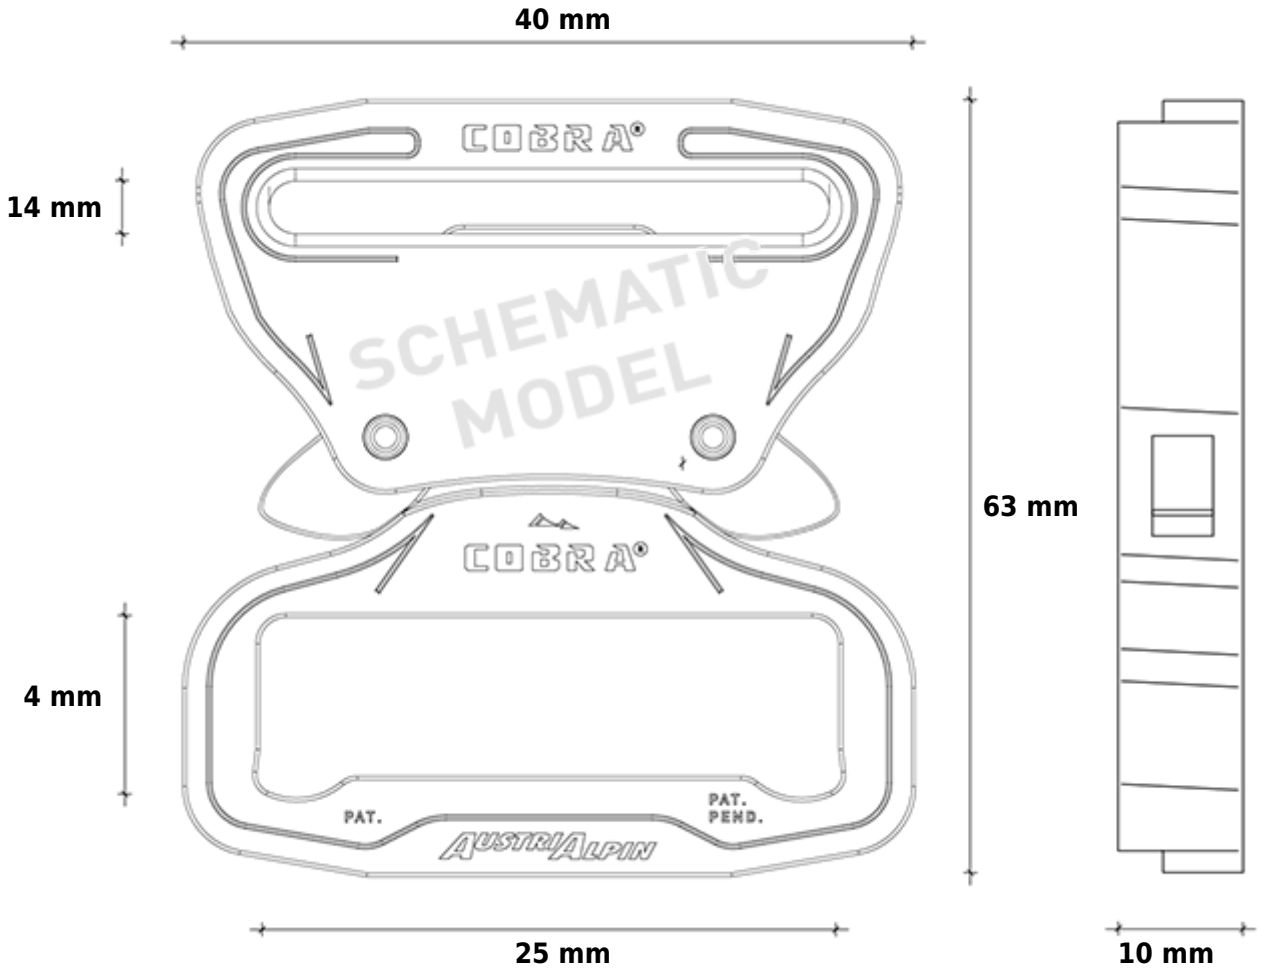


40 mm
14 mm
63 mm
4 mm
COBRA
SCHEMATIC MODEL
COBRA
PAT.
PAT. PEND.
AUSTRIALPIN
25 mm
10 mm