COBRA OUL 9 KN

ALUMINIUM

50 mm, XL clips, open under load
Art.no.: FO50KVF-XL



Unlike all other COBRA® Quick Release buckles, the COBRA® OUL can be opened under load. Therefore it can for example be used to secure cargo or wherever items have to be immediately accessible. This is why it can't be used as a personal protective equipment. However, the breaking load is still the same as the one of the non-OUL models. A COBRA® OUL can not be combined with a regular COBRA®, but a COBRA® OUL can be combined any other COBRA® OUL of the same type.

The COBRA® OUL (9 kN) can be opened under load. In combination with a fitting webbing, the minimum guaranteed load capacity is 18 kN in loop configuration. Not suitable as PPE!


use cases:
Fashion, tactical, equipment

Technical specifications

BODY	**Material:** aluminium **Color:** black **Finish:** ktl-coated
CLIPS	**Material:** brass **Color:** colorless **Finish:** polished
BAR	**Material:** stainless steel **Color:** colorless **Finish:** polished
BREAKING LOAD TENSILE STRENGTH	9 kN
BREAKING LOAD LOOP CONFIGURATION	18 kN
WEIGHT	80 g
RECOMM. WEBBING WIDTH MALE PART	50 mm

RECOMM. WEBBING WIDTH FEMALE PART	50 mm
SLOT WIDTH MALE PART	12 mm
SLOT WIDTH FEMALE PART	4 mm
OUTER DIMENSION LENGTH	63 mm
OUTER DIMENSION WIDTH	64 mm
OUTER DIMENSION DEPTH	10 mm
WEBBING SLOT MALE PART	adjustable
WEBBING SLOT FEMALE PART	non-adjustable
SIZE OF CLIPS	XL
COUNTRY OF ORIGIN	Austria
Patented	
STANDARDS	EN ISO 9227

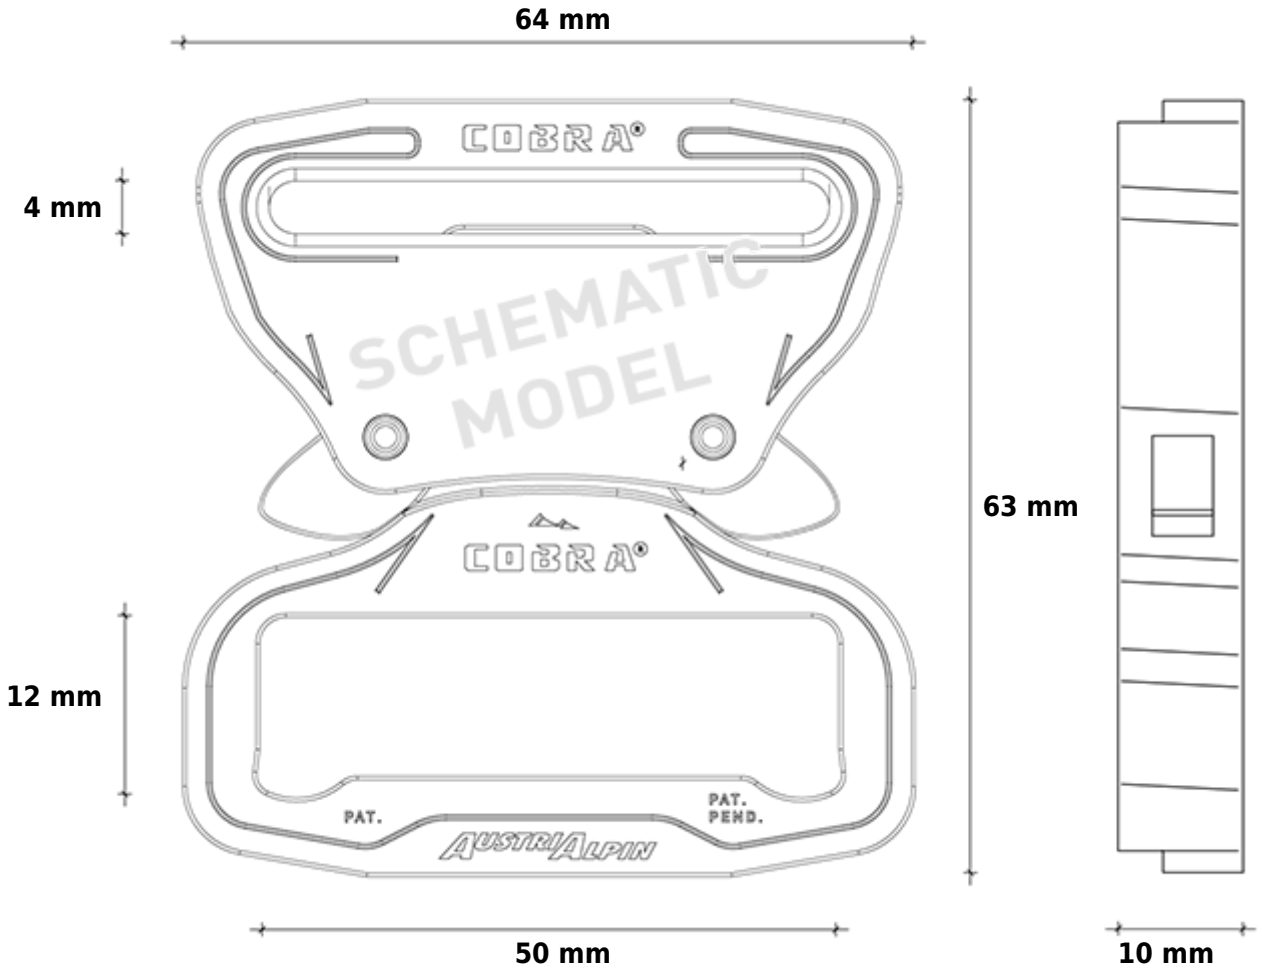


64 mm
4 mm
12 mm
63 mm
50 mm
10 mm
COBRA
COBRA
SCHEMATIC MODEL
PAT.
PAT. PEND.
AUSTRIALPIN