COBRA® PRO STYLE
ALUMINIUM

25 mm, XL clips
Art.no.: FY25KFV-XL



The COBRA® PRO STYLE is the world leading safety buckle made of aluminium. Thanks to its patented locking mechanism and high breaking strength it meets the highest safety requirements. In combination with a fitting webbing, the minimum guaranteed load capacity is 9 kN tensile strength and 18 kN in loop configuration.

Features:

- Both clips need to be pressed at the same time to open the COBRA®. One-sided release by pressing only one clip is nearly impossible.
- A release under tension is impossible.
- A one-sided locking is nearly impossible. Locking is confirmed by a distinct “clicking” sound.
- The cut-out on the backside of the COBRA® PRO STYLE prevents dirt, dust, ice or snow from getting caught in the buckle, which increases the extrem e performance capabilities and lifetime even more.
- All sizes and variants of the COBRA® PRO STYLE are compatible.

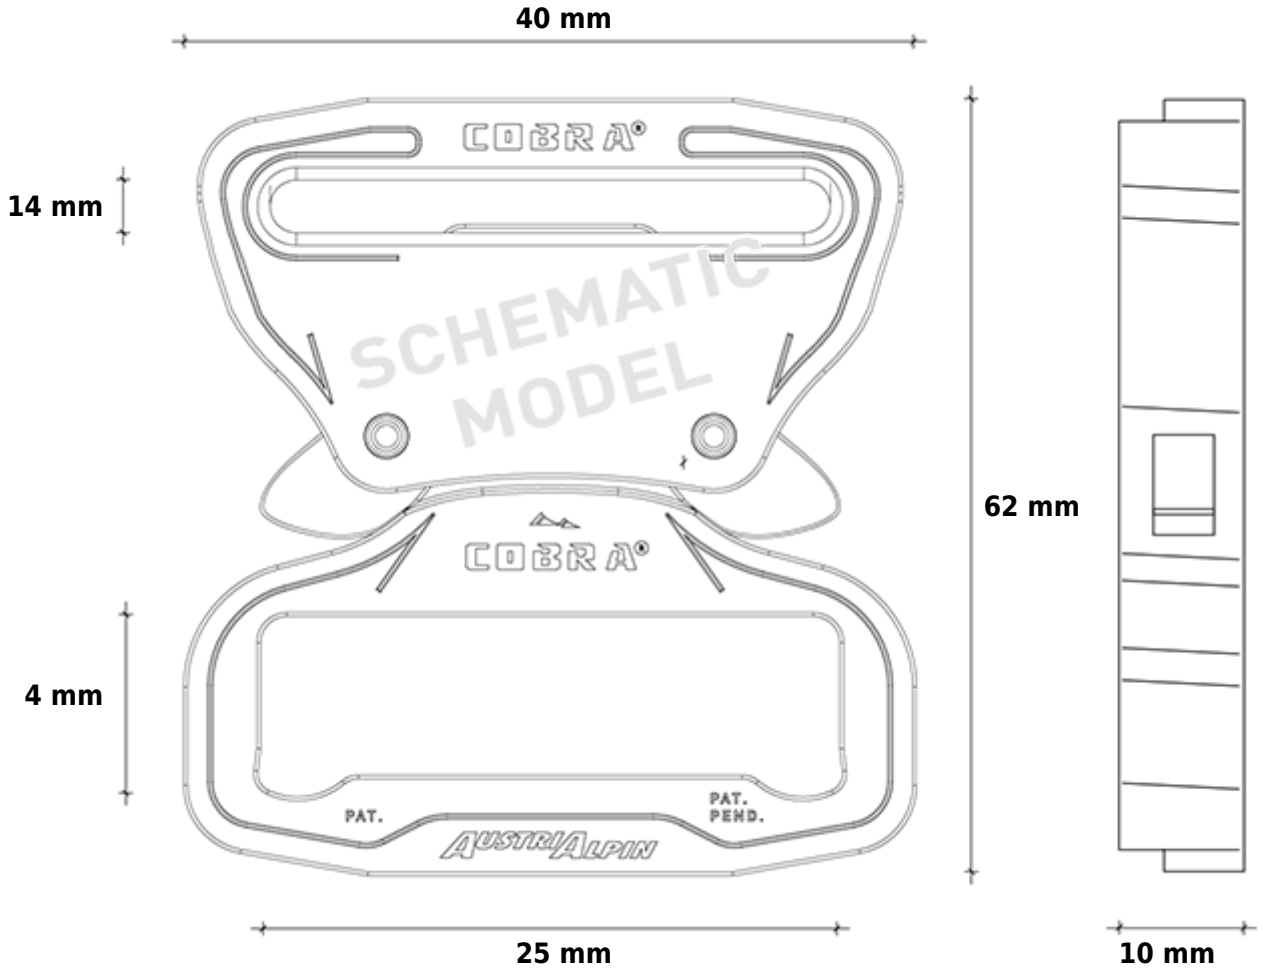
use cases:
PPE, Fashion, air sports, tactical, equipment

Technical specifications

BODY	**Material:** aluminium **Color:** black **Finish:** ktl-coated
CLIPS	**Material:** brass **Color:** colorless **Finish:** polished
BAR	**Material:** stainless steel **Color:** colorless **Finish:** polished
BREAKING LOAD TENSILE STRENGTH	9 kN

BREAKING LOAD LOOP CONFIGURATION	18 kN
WEIGHT	59 g
RECOMM. WEBBING WIDTH MALE PART	25 mm
RECOMM. WEBBING WIDTH FEMALE PART	25 mm
SLOT WIDTH MALE PART	4 mm
SLOT WIDTH FEMALE PART	14 mm
OUTER DIMENSION LENGTH	62 mm
OUTER DIMENSION WIDTH	40 mm
OUTER DIMENSION DEPTH	10 mm
WEBBING SLOT MALE PART	non-adjustable
WEBBING SLOT FEMALE PART	adjustable
SIZE OF CLIPS	XL
COUNTRY OF ORIGIN	Austria
Patented	
STANDARDS	EN358:2018-11 (partial), EN ISO 9227


PAT.
PAT. PEND.
FY
25
18kN
9kN
WV
COBRA®
PRO STYLE
MF
PAT.
PAT. PEND.


40 mm
14 mm
COBRA®
SCHEMATIC
MODEL
62 mm
COBRA®
4 mm
PAT.
PAT.
PEND.
AUSTRIALPIN
25 mm
10 mm