COBRA® PRO STYLE
ALUMINIUM

50 mm, XL clips
Art.no.: FY50KVV-XL



The COBRA® PRO STYLE is the world leading safety buckle made of aluminium. Thanks to its patented locking mechanism and high breaking strength it meets the highest safety requirements. In combination with a fitting webbing, the minimum guaranteed load capacity is 9 kN tensile strength and 18 kN in loop configuration.

This version of the COBRA® PRO STYLE is intended for 50 mm webbing width. The ergonomically designed brass clips of XL-size facilitate the opening of the buckle. Thanks to the adjuster bar on both parts of the buckle, no stitching is needed. The webbing length can be adjusted individually.

Features:

- Both clips need to be pressed at the same time to open the COBRA®. One-sided release by pressing only one clip is nearly impossible.
- A release under tension is impossible.
- A one-sided locking is nearly impossible. Locking is confirmed by a distinct “clicking” sound.
- The cut-out on the backside of the COBRA® PRO STYLE prevents dirt, dust, ice or snow from getting caught in the buckle, which increases the extrem e performance capabilities and lifetime even more.
- All sizes and variants of the COBRA® PRO STYLE are compatible.

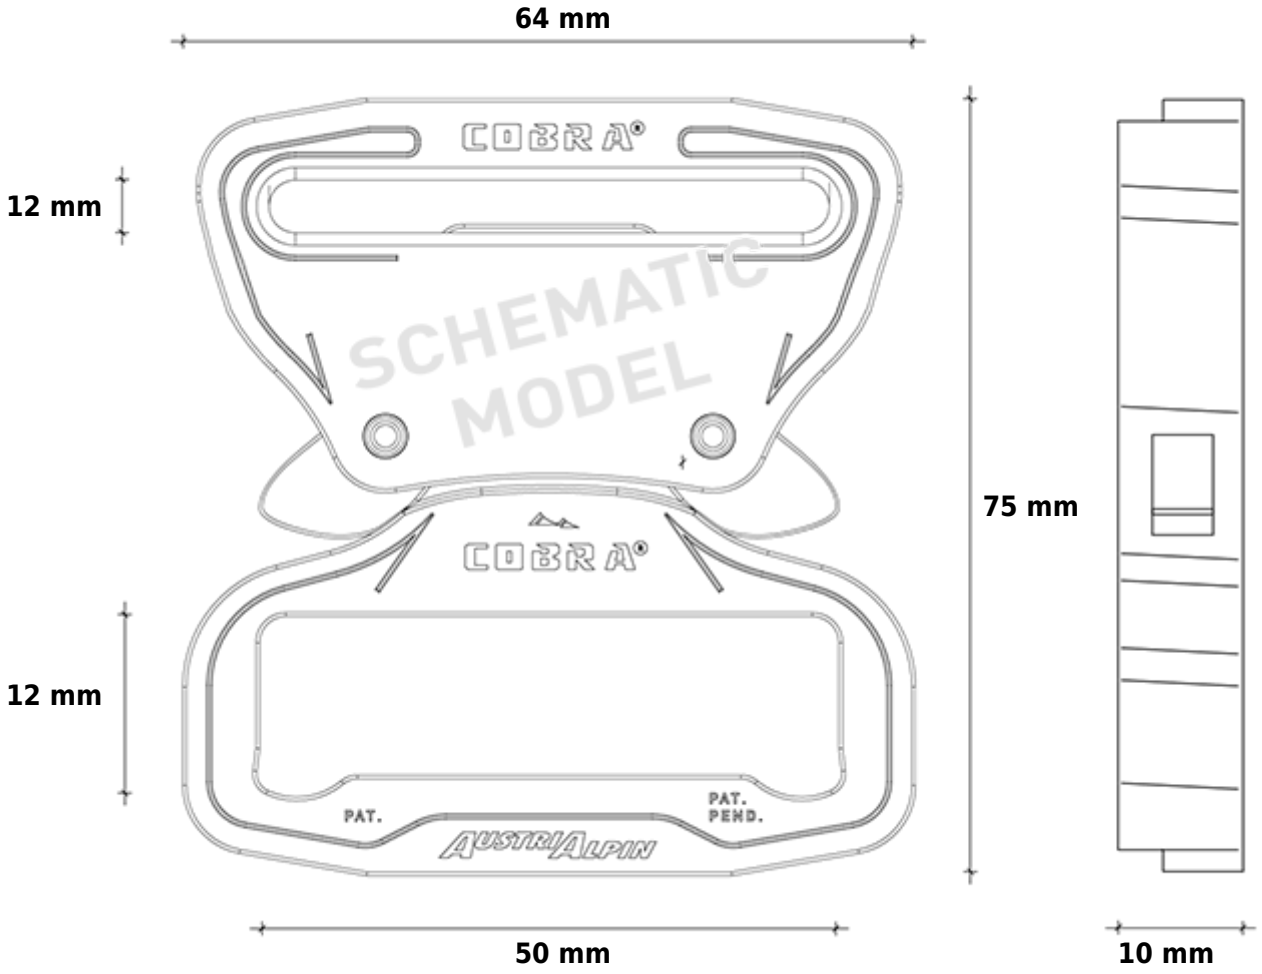
use cases:
PPE, Fashion, air sports, tactical, equipment

Technical specifications

BODY	**Material:** aluminium **Color:** black **Finish:** ktl-coated
CLIPS	**Material:** brass **Color:** colorless **Finish:** polished

BAR	**Material:** stainless steel **Color:** colorless **Finish:** polished
BREAKING LOAD TENSILE STRENGTH	9 kN
BREAKING LOAD LOOP CONFIGURATION	18 kN
WEIGHT	95 g
RECOMM. WEBBING WIDTH MALE PART	50 mm
RECOMM. WEBBING WIDTH FEMALE PART	50 mm
SLOT WIDTH MALE PART	12 mm
SLOT WIDTH FEMALE PART	12 mm
OUTER DIMENSION LENGTH	75 mm
OUTER DIMENSION WIDTH	64 mm
OUTER DIMENSION DEPTH	10 mm
WEBBING SLOT MALE PART	adjustable
WEBBING SLOT FEMALE PART	adjustable
SIZE OF CLIPS	XL
COUNTRY OF ORIGIN	Austria
Patented	
STANDARDS	EN358:2018-11 (partial), EN ISO 9227


COBRA®
PRO STYLE
FY 50
18kN
9kN
WV
PAT. PEND.
PAT.


64 mm
12 mm
12 mm
75 mm
50 mm
10 mm
COBRA®
SCHEMATIC MODEL
PAT.
PAT. PEND.
AUSTRIALPIN