

## OVALO

### GI SCREWLOCK WITH BRASS SLEEVE

**aluminium, anodized**

Art.no.: KA13B-B-GI



OVALO – the yogi among the carabiners: Its oval form benefits the optimal position of the carabiner along its transverse axis and thus reduces dangerous transverse loading in every situation. Additionally, the round profile prevents the build-up of sharp edges due to rope friction and allows a fluid rope management. The OVALO screwlock carabiner with smooth-running, corrosion-resistant brass sleeve. Thanks to a special milling at the thread, the screwlock has a unique self-cleaning process. Special features of the OVALO GI screwlock are its red visual safety band [Gate Red] and a unique identification number [ID].


#### use cases:

sports climbing, ice climbing, mountain sports, canyoning, PPE

## Technical specifications

|                                                     |                                                                                  |
|-----------------------------------------------------|----------------------------------------------------------------------------------|
| <b>BODY</b>                                         | <b>Material:</b> aluminium<br><b>Color:</b> azure<br><b>Finish:</b> anodized     |
| <b>GATE</b>                                         | <b>Material:</b> aluminium<br><b>Color:</b> colorless<br><b>Finish:</b> polished |
| <b>SLEEVE</b>                                       | <b>Material:</b> brass<br><b>Color:</b> colorless<br><b>Finish:</b> polished     |
| <b>WEIGHT</b>                                       | 71 g                                                                             |
| <b>LENGTH</b>                                       | 105 mm                                                                           |
| <b>WIDTH</b>                                        | 56 mm                                                                            |
| <b>MIN. BREAKING LOAD IN LONGITUDINAL DIRECTION</b> | 24 kN                                                                            |
| <b>MIN. BREAKING LOAD IN THE MINOR AXIS</b>         | 10 kN                                                                            |

|                                          |                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MIN. BREAKING LOAD WITH OPEN GATE</b> | 7 kN                                                                                                                                                                                                                                                                                                                                               |
| <b>LOCK</b>                              | screwlock                                                                                                                                                                                                                                                                                                                                          |
| <b>FEATURES</b>                          | ID+GateRed                                                                                                                                                                                                                                                                                                                                         |
| <b>GATE OPENING</b>                      | 19 mm                                                                                                                                                                                                                                                                                                                                              |
| <b>COUNTRY OF ORIGIN</b>                 | Austria                                                                                                                                                                                                                                                                                                                                            |
| <b>EAN CODE</b>                          | 9006381013654                                                                                                                                                                                                                                                                                                                                      |
| <b>COLOR VARIATIONS</b>                  |  anthracite [Art.no.: KA13B-G-GI]<br> red [Art.no.: KA13B-R-GI]<br> black [Art.no.: KA13B-Z-GI] |
| <b>STANDARDS</b>                         | EN 12275:2013 (B), EN 362:2004 (B), UIAA 121                                                                                                                                                                                                                                                                                                       |

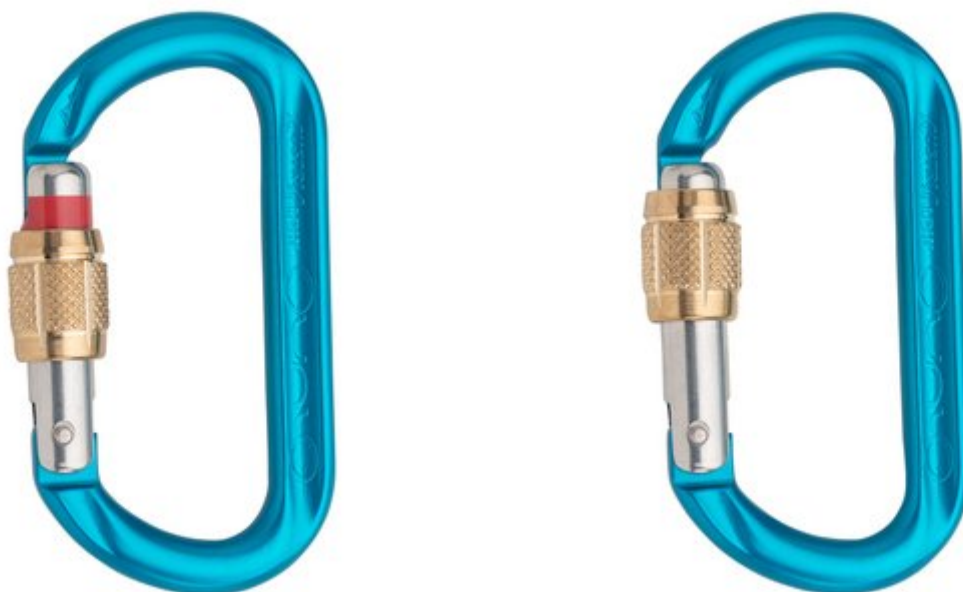

### UNIQUE IDENTIFICATION NUMBER (ID)

