D-RING COBRA® PRO STYLE 18 KN SNAKEBITE

ALUMINIUM

25 mm, standard clips
Art.no.: FX25KVD-LS



The D-RING COBRA® PRO STYLE 18 kN SNAKEBITE is a powerful fusion of three classical AUSTRIALPIN components: the COBRA® PRO STYLE 18 kN Aluminium buckle, which meets the highest safety requirements, and the stainless-steel D-RING, which is mounted directly on the female part of the buckle. The additionally attached innovative SNAKEBITE polymer clamp locks the adjustable belt strap in place and prevents webbing creep, even when you're on the move.

This innovative buckle combines the patented COBRA® QUICK RELEASE Technology with the flexibility of a D-RING and the practicality of the SNAKEBITE clamp. Ist unique design prevents the D-RING from getting squeezed and blocked under tension.

The D-RING COBRA® PRO STYLE 18 kN buckles are thicker and stronger than the standard COBRA® PRO STYLE and comply with the ANSI Z359.12-2019 standard with a minimum tensile strength of 15 kN for the buckle and 22 kN for the D-RING. We guarantee 18 kN for the buckle (straight pull) in the technical specifications.

Features:

- Both clips need to be pressed at the same time to open the COBRA®. One-sided release by pressing only one clip is nearly impossible.
- A release under tension is impossible.
- A one-sided locking is nearly impossible. Locking is confirmed by a distinct "clicking" sound.
- The cut-out on the backside of the COBRA® PRO STYLE prevents dirt, dust, ice or snow from getting caught in the buckle, which increases the extreme performance capabilities and lifetime even more.
- All sizes and variants of the D-RING COBRA® PRO STYLE 18 kN are compatible.


use cases:
PPE, Fashion, air sports, tactical, equipment

Technical specifications

BODY	**Material:** aluminium **Color:** black **Finish:** ktl-coated

CLIPS	**Material:** brass **Color:** colorless **Finish:** polished
BAR	**Material:** stainless steel **Color:** colorless **Finish:** polished
D-RING	**Material:** stainless steel **Color:** colorless **Finish:** polished
BREAKING LOAD TENSILE STRENGTH	18 kN
BREAKING LOAD D-RING	22 kN
WEIGHT	128 g
RECOMM. WEBBING WIDTH MALE PART	25 mm
RECOMM. WEBBING WIDTH FEMALE PART	25 mm
OUTER DIMENSION LENGTH	67 mm
OUTER DIMENSION WIDTH	46 mm
OUTER DIMENSION DEPTH	14 mm
WEBBING SLOT MALE PART	adjustable, Snakebite
WEBBING SLOT FEMALE PART	with integrated D-ring, non-adjustable
SINGLE PIECE TESTED	Yes
COUNTRY OF ORIGIN	Austria
Patented	

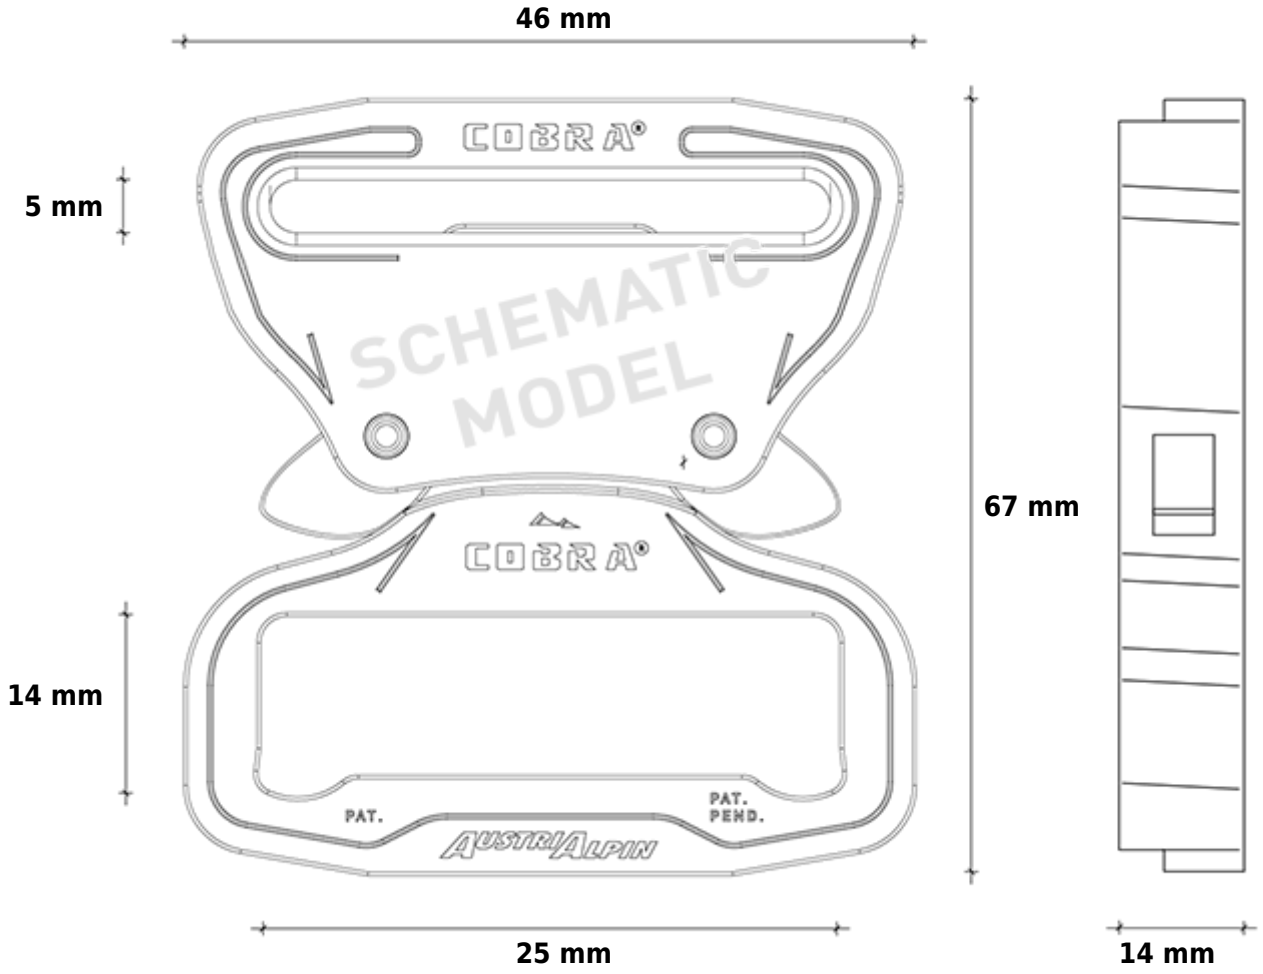


46 mm
5 mm
14 mm
67 mm
25 mm
14 mm
COBRA
SCHEMATIC MODEL
PAT.
PAT. PEND.
AUSTRIALPIN