

OVALO

GI SCREWLOCK WITH BRASS SLEEVE

anodized

Art.no.: KA13B-B-GI




OVALO – the yogi among the carabiners: Its oval form benefits the optimal position of the carabiner along its transverse axis and thus reduces dangerous transverse loading in every situation. Additionally, the round profile prevents the build-up of sharp edges due to rope friction and allows a fluid rope management. The OVALO screwlock carabiner with smooth-running, corrosion-resistant brass sleeve. Thanks to a special milling at the thread, the screwlock has a unique self-cleaning process. Special features of the OVALO GI screwlock are its red visual safety band [Gate Red] and a unique identification number [ID].


use cases:

sports climbing, ice climbing, mountain sports, canyoning, PPE

Technical specifications

| | |
|---|--|
| BODY | Material: aluminium Color: azure Finish: anodized |
| GATE | Material: aluminium Color: colorless Finish: polished |
| SLEEVE | Material: brass Color: colorless Finish: polished |
| WEIGHT | 71 g |
| LENGTH | 105 mm |
| WIDTH | 58 mm |
| MIN. BREAKING LOAD IN LONGITUDINAL DIRECTION | 24 kN |
| MIN. BREAKING LOAD IN THE MINOR AXIS | 10 kN |

| | |
|--|---|
| MIN. BREAKING LOAD WITH OPEN GATE | 7 kN |
| LOCK | screw lock |
| FEATURES | ID+GateRed |
| GATE OPENING | 19 mm |
| COUNTRY OF ORIGIN | Austria |
| EAN CODE | 9006381013654 |
| COLOR VARIATIONS |  <p>anthracite [Art.no.: KA13B-G-GI]</p> <p>red [Art.no.: KA13B-R-GI]</p> <p>black [Art.no.: KA13B-Z-GI]</p> |
| STANDARDS | EN 12275:2013 (B), EN 362:2004 (B), UIAA 121 |

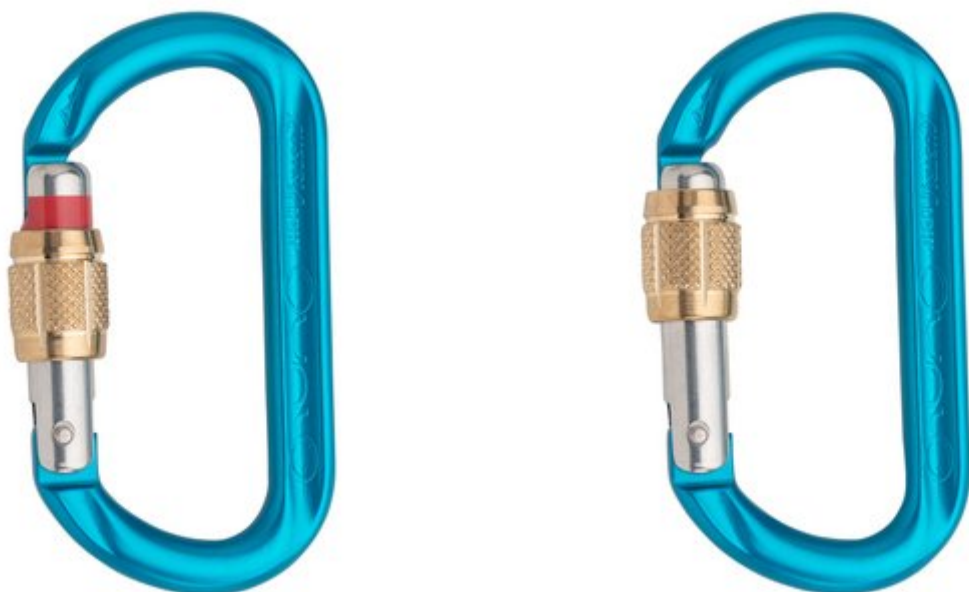

UNIQUE IDENTIFICATION NUMBER (ID)

